

*Specialty*

## Battery Range Summary

Since its introduction in the early 1990s, the Genesis® Thin Plate Pure Lead (TPPL) battery has established itself as a premium high performance battery suitable for a wide range of demanding applications.

Today, Genesis EP batteries are found in applications as diverse as electronics, medical equipment, telecommunications, renewable energy, computer backup and UPS applications. In addition to its superior performance characteristics, the Genesis EP battery excels in physically demanding applications such as high temperature and high vibration environments.

The TPPL technology allows the battery to pack more power into a smaller footprint. The EP brand also offers deep cycling capabilities, fast recharge abilities and a non-spillable design which allows mounting in any position except inverted.

### Features and Benefits

- Capacity range 13 - 200Ah
- High power density
- Excellent cycle life
- Superior float life
- High stable voltage delivery
- Wide temperature range
- Rugged construction
- Fastest recharge when compare to other sealed lead batteries
- 2 year shelf life



## Construction

- 12V pure lead-tin Valve Regulated Lead Acid (VRLA) Absorbent Glass Mat (AGM) battery
- UL 94V0 flame retardant case and cover
- M6 no-maintenance terminals
- Can be installed in any orientation except inverted
- Rugged construction (optional metal jacket - G200EP excluded)
- Approved for shipping as non-hazardous, non-spillable (refer to SDS sheet)

## Installation and Operation

- -40°F (-40°C) to 176°F (80°C) with optional metal jacket (G200EP excluded)
- 2 year shelf life at 77°F (25°C)
- Cycle life up to 400 cycles at 80% depth of discharge

## Standards

- Non-spillable classification
- Recognized by UL File no. MH12544 (excludes G200EP); G200EP recognized by UL File no. MH18697
- The management systems governing the manufacture of this product are ISO 9001:2008 and ISO 140001:2004 certified

## General Specifications

| Battery Type | Nominal Voltage (V) | Nominal Capacity (Ah) | Nominal Dimensions |       |       |       |        |       | Typical Weight |      | Torque |     | Internal Resistance (mΩ) | Short Circuit Current (A) |
|--------------|---------------------|-----------------------|--------------------|-------|-------|-------|--------|-------|----------------|------|--------|-----|--------------------------|---------------------------|
|              |                     | 10 Hr Rate-Ah         | Length             |       | Width |       | Height |       | lbs            | kg   | in-lbs | Nm  |                          |                           |
| G13EP        | 12                  | 13                    | 6.89               | 175.0 | 3.27  | 83.1  | 5.08   | 129.0 | 10.8           | 4.9  | 50     | 5.6 | 8.1                      | 600                       |
| G16EP        | 12                  | 16                    | 7.12               | 180.8 | 2.99  | 75.9  | 6.57   | 166.9 | 13.5           | 6.1  | 50     | 5.6 | 6.9                      | 1000                      |
| G26EP        | 12                  | 28                    | 6.54               | 166.1 | 6.89  | 175.0 | 4.92   | 125.0 | 22.3           | 10.1 | 60     | 6.8 | 4.3                      | 1140                      |
| G42EP        | 12                  | 42                    | 7.74               | 196.6 | 6.50  | 165.1 | 6.69   | 169.9 | 32.9           | 14.9 | 60     | 6.8 | 3.8                      | 1430                      |
| G70EP        | 12                  | 72                    | 12.94              | 328.7 | 6.54  | 166.1 | 6.85   | 174.0 | 53.5           | 24.3 | 60     | 6.8 | 2.8                      | 2100                      |
| G200EP       | 12                  | 200                   | 22.87              | 580.9 | 4.92  | 125.0 | 12.46  | 316.5 | 132.3          | 59.9 | 44     | 5.0 | 3.3                      | 3800                      |

## Constant Current Discharge Performance

Constant current discharge rate, amps to 10.02V at 77°F (25°C)


| Battery Type | Minutes |       |       | Hours |      |      |      |      |
|--------------|---------|-------|-------|-------|------|------|------|------|
|              | 10      | 15    | 30    | 1     | 5    | 8    | 10   | 20   |
| G13EP        | 41.4    | 30.8  | 17.9  | 10.3  | 2.5  | 1.6  | 1.3  | 0.7  |
| G16EP        | 49.3    | 36.6  | 21.5  | 12.6  | 3.1  | 2.1  | 1.7  | 0.9  |
| G26EP        | 87.6    | 65.4  | 38.3  | 22.1  | 5.3  | 3.5  | 2.9  | 1.5  |
| G42EP        | 118.9   | 90.3  | 54.4  | 32.1  | 8.0  | 5.4  | 4.4  | 2.3  |
| G70EP        | 218.5   | 165.7 | 98.5  | 57.0  | 13.6 | 9.0  | 7.3  | 3.9  |
| G200EP       | 475.6   | 380.4 | 241.9 | 150.8 | 36.9 | 24.3 | 19.8 | 10.4 |

## Constant Power Discharge Performance

Constant power discharge rate, watts per battery to 10.02V at 77°F (25°C)

| Battery Type | Minutes |        |        | Hours  |       |       |       |       |
|--------------|---------|--------|--------|--------|-------|-------|-------|-------|
|              | 10      | 15     | 30     | 1      | 5     | 8     | 10    | 20    |
| G13EP        | 467.0   | 348.0  | 206.0  | 120.0  | 30.0  | 20.0  | 16.0  | 9.0   |
| G16EP        | 560.0   | 421.0  | 251.0  | 149.0  | 38.0  | 25.0  | 20.0  | 11.0  |
| G26EP        | 990.0   | 749.0  | 446.0  | 260.0  | 63.0  | 42.0  | 34.0  | 18.0  |
| G42EP        | 1333.0  | 1026.0 | 629.0  | 376.0  | 96.0  | 64.0  | 52.0  | 28.0  |
| G70EP        | 2443.0  | 1879.0 | 1139.0 | 669.0  | 162.0 | 107.0 | 87.0  | 46.0  |
| G200EP       | 5148.0  | 4189.0 | 2736.0 | 1746.0 | 442.0 | 293.0 | 238.0 | 125.0 |

## Outline Drawings

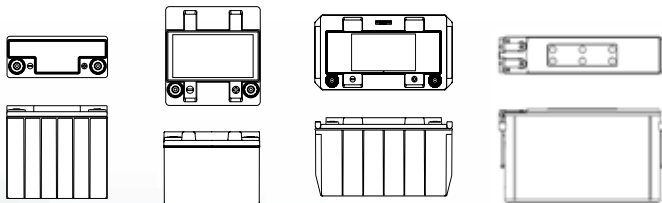

G13EP and G16EP

G26EP and G42EP

G70EP

G200EP

## Charge Voltage

Cyclic use: 14.4V to 15.0V at 77°F (25°C) No current limit  
 Float use: 13.5V to 13.8V at 77°F (25°C) No current limit

Drawing sizes are for terminal position reference only;  
 Diagrams are not proportionate to each other

