

⚡ Specifications

Nominal Voltage(V)

12V

Nominal Capacity

10 hour rate	(10A	to	10.80V)	100Ah
5 hour rate	(17A	to	10.20V)	85Ah
1 hour rate	(60A	to	9.60V)	60Ah
1C	(100A	to	9.60V)	63.33Ah

Weight

Approx. 29.5kg(64.9Lbs.)

Internal Resistance (at 1KHz)

Approx. 5 mΩ

Maximum Discharge Current for

5 seconds:1200A

Charging Methods at 25°C(77°F)

Cycle use:

Charging Voltage 14.4 to 15.0V

Coefficient -5.0mV/°C/cell

Maximum Charging Current : 30A

Standby use:

Float Charging Voltage 13.5 to 13.8V

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge -15°C(5°F) to 40°C(104°F)

Discharge -15°C(5°F) to 50°C(122°F)

Storage -15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month 98%

3 month 94%

6 month 85%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Design Life

Eurobat (20°C) : 10/12 years

Terminal

F8



⚡ Dimensions

Length (L)

307±3 (12.09±0.12)

Width (W)

168±3 (6.61±0.12)

Height (H)

208±3 (8.19±0.12)

Overall Height (HT)

214±3 (8.43±0.12)

Description of torque value of hard ware for the terminals:


Recommended torque value

M6:7 N-m (71kgf-cm)


Maximum allowable torque value

M6:9 N-m (92kgf-cm)


mm(inch)

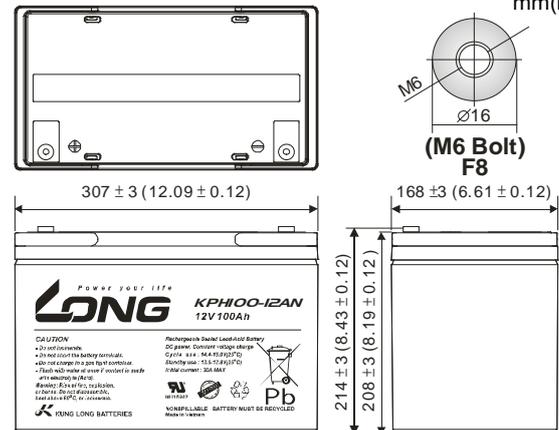


(V) FOR 12V BATTERY Discharge Time VS. Discharge Current (25°C)

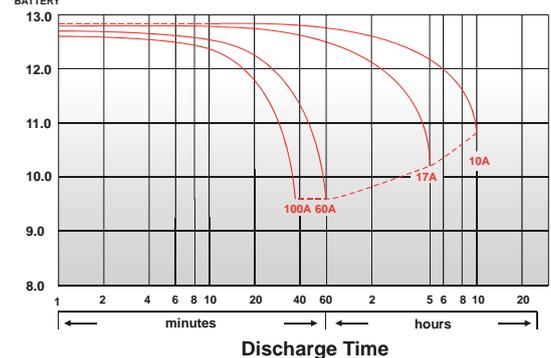


Effect of Temperature on Capacity 25°C(77°F)

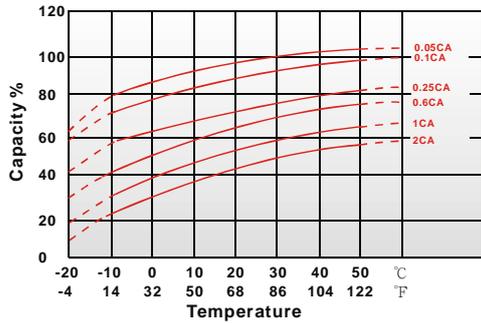


Capacity Retention Characteristic

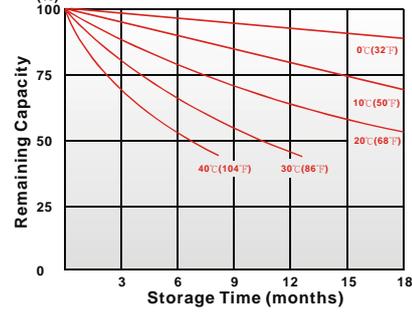

Cycle Service Life

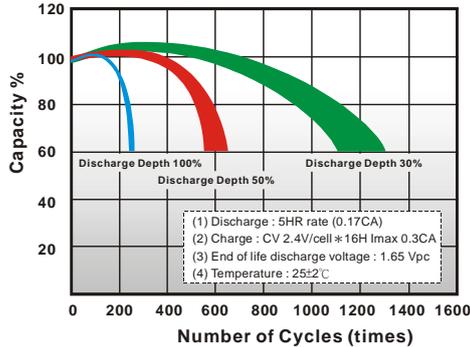

Trickle (or float) Service Life

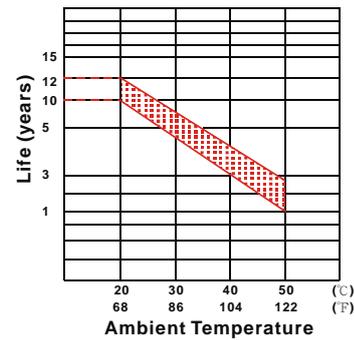

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time	min	458	512	549	584	600	617	649
5	min	348	380	407	432	443	455	477
10	min	277	301	320	338	346	354	370
15	min	163	174	183	191	195	199	206
30	min	112	116	119	122	123	125	126
60	min	66.3	69.5	72.0	73.5	74.5	75.7	77.2
120	min	47.2	49.7	51.8	52.2	53.0	54.0	55.2
180	min	35.2	37.3	39.3	41.3	42.0	42.8	43.8
240	min	31.3	32.8	34.2	35.2	35.5	36.0	36.7
300	min	18.0	19.2	20.0	20.8	21.2	21.5	21.8
600	min	10.4	10.7	11.0	11.2	11.3	11.4	11.5
1200	min							

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time	min	202	267	305	336	346	358	375
5	min	159	188	209	226	234	243	257
10	min	119	146	165	179	184	190	198
15	min	71.2	83.7	92.1	101	103	106	111
30	min	43.6	50.8	56.5	60.6	61.5	63.0	64.9
60	min	25.8	29.3	32.5	35.6	36.4	37.3	38.5
120	min	22.6	23.7	24.8	25.7	26.1	26.5	27.2
180	min	18.3	19.1	19.8	20.5	20.8	21.1	21.6
240	min	16.1	16.7	17.2	17.6	17.8	17.9	18.1
300	min	9.71	10.0	10.2	10.4	10.5	10.6	10.7
600	min	5.09	5.26	5.38	5.48	5.53	5.57	5.64
1200	min							

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

071118-1A-DEU0002