

## WP10-12SE 12Volt 10Ah

### Specifications

Nominal Voltage(V) **12V**

#### Nominal Capacity

20 hour rate	(0.5A	to	10.50V)	<b>10Ah</b>
10 hour rate	(0.95A	to	10.50V)	<b>9.5Ah</b>
5 hour rate	(1.7A	to	10.20V)	<b>8.5Ah</b>
1 C	(10A	to	9.60V)	<b>5.67Ah</b>
3 C	(30A	to	9.60V)	<b>4Ah</b>

Weight **Approx. 3.29kg(7.24Lbs.)**

Internal Resistance (at 1KHz) **Approx. 11 mΩ**

#### Maximum Discharge Current for

5 seconds: **150A**

#### Charging Methods at 25 (77 )

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient -5.0mV/ /cell

Maximum Charging Current : **3A**

Standby use:

Float Charging Voltage **13.5 to 13.8V**

Coefficient -3.0mV/ /cell

#### Operating Temperature Range

Charge **-15 (5 ) to 40 (104 )**

Discharge **-15 (5 ) to 50 (122 )**

Storage **-15 (5 ) to 40 (104 )**

#### Charge Retention (shelf life) at 20 (68 )

1 month **92%**

3 month **90%**

6 month **80%**

Case Material **ABS UL94 HB**


Option: Flammability resistance of (UL94 V-0)

Terminal **F1 or F2 (Faston Tab 187 or 250)**




### Dimensions


mm(inch)

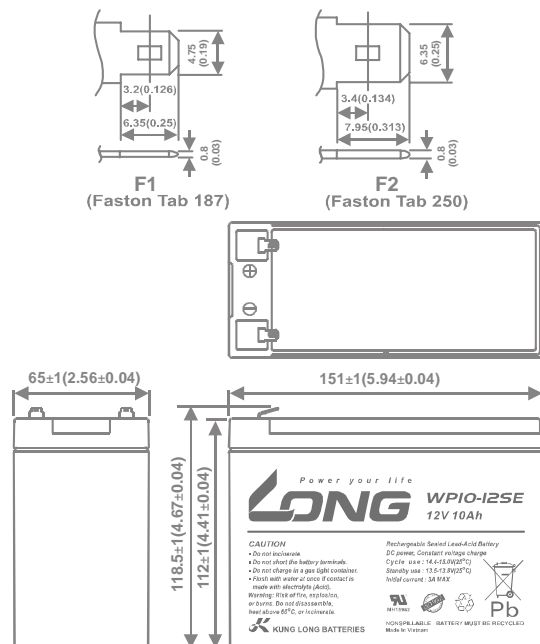


(v) FOR 12V BATTERY Discharge Time VS. Discharge Current (25 )

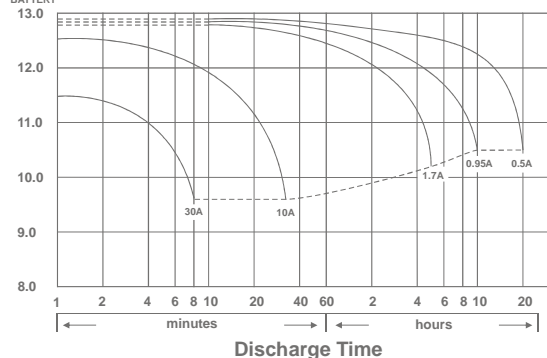


Effect of Temperature on Capacity 25 (77 )

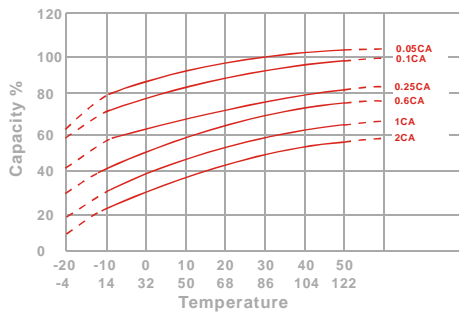


Capacity Retention Characteristic

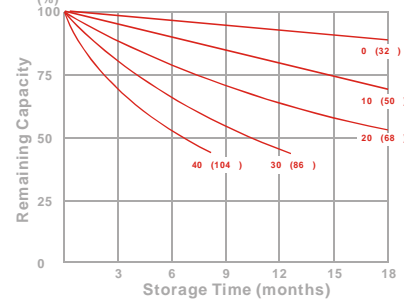

Trickle (or float) Service Life



Cycle Service Life

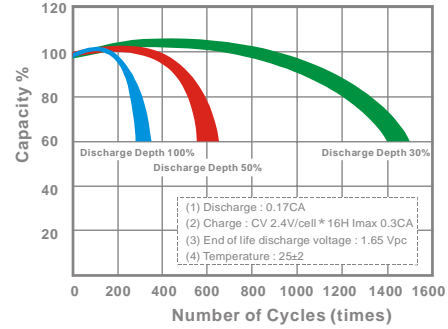

## - PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77 )

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	49.7	57.2	60.2	62.7	63.7	64.7	65.8
10	min	37.7	41.2	43.0	44.3	44.8	45.5	46.3
15	min	29.2	31.3	32.7	33.7	34.2	34.7	35.2
30	min	18.3	19.2	19.7	20.0	20.3	20.5	20.7
60	min	10.4	11.2	11.6	11.9	12.0	12.1	12.2
120	min	5.88	6.43	6.72	6.92	7.00	7.10	7.20
180	min	4.57	4.95	5.20	5.38	5.43	5.52	5.60
240	min	3.78	3.92	4.02	4.10	4.13	4.18	4.23
300	min	3.32	3.42	3.48	3.53	3.57	3.60	3.63
600	min	1.92	1.97	2.02	2.07	2.08	2.10	2.13
1200	min	1.06	1.09	1.11	1.15	1.15	1.16	1.17

- Discharge Rates in Amperes to Various End Voltages at 25 (77 )

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	24.6	29.3	32.7	34.1	34.9	35.6	36.1
10	min	21.4	24.1	25.6	26.7	27.1	27.6	28.3
15	min	15.6	17.2	18.4	19.1	19.5	19.9	20.4
30	min	10.7	11.3	11.8	12.2	12.4	12.6	12.8
60	min	5.69	6.03	6.26	6.45	6.58	6.63	6.69
120	min	3.24	3.39	3.48	3.56	3.59	3.62	3.67
180	min	2.55	2.63	2.68	2.72	2.74	2.76	2.79
240	min	1.96	2.01	2.05	2.08	2.09	2.11	2.12
300	min	1.69	1.72	1.74	1.76	1.77	1.78	1.79
600	min	0.974	1.00	1.02	1.04	1.05	1.06	1.07
1200	min	0.525	0.527	0.532	0.536	0.538	0.541	0.544

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%),10min X < 60min(+8%~-8%), X 60min(+5%~-5%)